code CR1018209 Q90BR/GM80

SERIE QUEEN 9

GENERAL FEATURES

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas ranges having burners with various configurations and power ratings: 3.5 kW 5.7 kW, 7 kW and 10 kW. Double-ring burners for 7 and 10 kW models
- Wide range of accessories

The knobs offer optimum grip and help the chef to have the setting controls right under his eyes. Special attention has also been paid to the knob bezel that has been expertly designed to avoid penetration of liquids and/or dirt. Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



TECHNICAL DETAILS

GAS

MOTORIZED TILTING

GAS BRATT PAN MOTORISED TILTING 80 LT - DUPLEX TANK

- Water filled via solenoid valve
- Self-balanced lid with double steel wall
- Safety device interrupting power supply when tub is lifted
- Adjustable temperature from 100 to 280°C.
- Stable flame burner;
- Electric ignition
- Thermocouple safety valve

Project:	
Rev.:	
Zone:	
Location:	



BARON Ali Group srl

Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com





Q90BR/GM80

QUEEN 9

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR1018209
DEFINITION	Q90BR/GM80 BRASIERA GAS M80 MOT.DUPLEX
COMMERCIAL LINE	QUEEN
SUPPLY	MISTA
WIDTH	800 MM
DEPTH	900 MM
HEIGHT	870 MM
NET WEIGHT	144,800
VOLUME	0,626 M3
PACKAGING LENGTH	860,000
PACKAGING WIDTH	1020,000
PACKAGING HEIGHT	1150,000
PACKAGING VOLUME	1,010
PACKAGING GROSS WEIGHT	160,000
POWER SUPPLY VOLTAGE STANDARD	220-240V 1N
FREQUENCY	50 Hz
ELECTRIC POWER	0,120 KW
GAS POWER (G30/30 MBAR)	20,00 KW
GAS POWER (G25/25 MBAR)	19,00 KW
IPX PROTECTION	IPX5
CERTIFIED MODEL	Q90BR/GM80
CERTIFICATION NUMBER	CE-0085BT0250
CERTIFICATION BODY	0085

Via del Boscon, 424 32100 Belluno - Italy

Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com







code CR1018209 Q90BR/GM80

QUEEN 9

ACCESSORIESES

CODE	MODEL	DESCRIPTION
CR0592770	ZA40	FRONT PLINTH
CR0982789	ZL90	SIDE PLINTH SERIE 900
MA97432000	NXR	SET OF WHEELS NXR
MA97433000	NXRI	SET OF WHEELS INOX NXRI
CR1015369	QCH20	DIRECTABLE WATER FLUE
CR0592869	CR0592869	4 PIEDI X INSTALL.SU ZOCCOLO DI CEMENTO
CR1015339	QPT	N. 4 PIEDINI IN ACCIAIO INOX PER INSTALLAZIONE SU PIANI
CR0592879	CR0592879	KIT ANTI RIBALTAMENTO 2 PIEDI X N900
CR0592399	NXTVT1	KIT PANNELLI X BASE TECN.1 FRONTE NXTVT1
CR0592409	NXTVT2	KIT PANNELLI X BASE TECN.2 FRONTI NXTVT2
CR1018879	Q90FTDX	FIANCO TERMINALE DESTRO QUEEN
CR1018889	Q90FTSX	FIANCO TERMINALE SINISTRO QUEEN
CR0980009	CANT	TUBULAR HANDRAIL FRONTALE (AL METRO LINEARE)
CR0980019	9CLAT	TUBULAR HANDRAIL LATERALE SERIE 900
BN418031900211	9PRD	PIANO LATERALE RIBALTABILE DESTRO
BN418031900460	9PFD	PIANO LATERALE FISSO DESTRO
BN418031900221	9PRS	PIANO LATERALE RIBALTABILE SINISTRO
BN418031900470	9PFS	PIANO LATERALE FISSO SINISTRO
BN418031900121	9KR	KIT STATIC WARMER





code CR1018209 Q90BR/GM80

QUEEN 9



PRODUCT'S RANGE PLUS




Self-balancing lids.



Wide-radius tilting cooking tank.



Equipment certified for low voltage directive 2014/35 / EU according to the international CB scheme.



The 8 rows of flame in the M80 model and 12 in the M120 model guarantee uniform cooking. A thermostat regulates the temperature from 100 to 280 °C for precision management of cooking.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.

BARON Ali Group srl

Via del Boscon, 424 32100 Belluno - Italy Tel. +39 0437 855411 Fax +39 0437 855444 info@baronprofessional.com www.baronprofessional.com






code CR1018209 MODEL Q90BR/GM80 QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

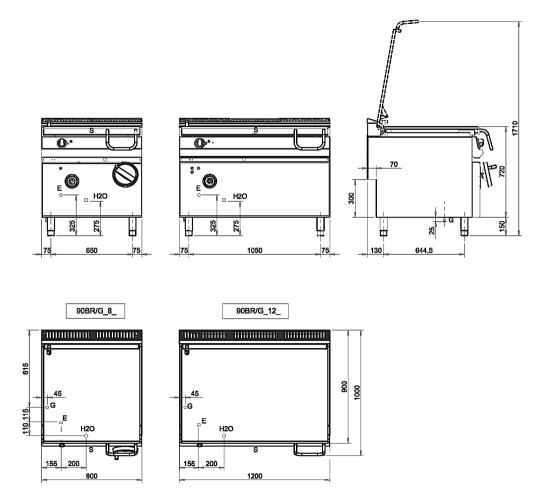

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E Pressacavo entrata linea elettrica Stopfbuchse Electric cable stress relief Presse étoupe de câble él Pisacable Elektrische kabelwartel
- G Attacco arrivo gas Gasanschluss Gas connection Arrivée gaz Union de gas Gasaansluiting EN 10226–1 R ½; EN ISO 228-1 G ½ (DK)
- H2O Attacco arrivo acqua Wasseranschluss Water inlet Arrivée eau Union de agua Ateraansluiting EN ISO 228-1 G 3/4
- S Scarico vasca Wannenabflussrohr Pan outlet Vidange du bac Descarga cuba Water toevoer

Via del Boscon, 424 32100 Belluno - Italy

