1 BASIN ELECTRIC PASTA-COOKER 40 LT - WITH SET OF 3 BASKET GN1/3

Project:

Rev.:

Zone:

Location:



CODE	MODEL	SERIE
CR1018299	Q90CP/E400	QUEEN 9

GENERAL FEATURES

- AISI 304 stainless-steel bases and worktops, Scotch-Brite finish
- Depth of 900 mm for high power and performance
- Catalogue offers more than 350 standard models
- Worktop, base cabinet, base cabinet with doors and oven versions
- 20/10 worktop thickness
- Twin-piece knobs prevent infiltration of dirt and have an IPX5 water ingress protection rating
- Gas ranges having burners with various configurations and power ratings: 3.5 kW 5.7 kW, 7 kW and 10 kW. Double-ring burners for 7 and 10 kW models
- Wide range of accessories

The knobs offer optimum grip and help the chef to have the setting controls right under his eyes. Special attention has also been paid to the knob bezel that has been expertly designed to avoid penetration of liquids and/or dirt. Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



TECHNICAL DETAILS

ELECTRIC

- 1 BASIN ELECTRIC PASTA-COOKER 40 LT WITH SET OF 3 BASKET $\rm GN1/3$
- Large capacity (42 litres) alloy AISI 316 stainless steel cooking tank with excellent corrosion resistance even at high temperatures. They are moulded with internal rounded corners for maximum hygiene and cleaning, and are equipped with wide foam expansion areas and a drain device for residue starch;
- Safety thermostat in tub to avoid dry functioning;
- Stainless steel armoured heating elements in tub;
- Re-arm circuit breaker of heating elements unit;
- Multi-position power regulator, independent for each tub







CR1018299

MODEL Q90CP/E400 SERIE QUEEN 9

TECHNICAL INFORMATION

MODEL Q90CP/E400 COMMERCIAL LINE QUEEN SUPPLY ELETTRICA WIDTH 400 MM	PASTA EL. 1V.40LT M40
MODEL Q90CP/E400 COMMERCIAL LINE QUEEN SUPPLY ELETTRICA WIDTH 400 MM	PASTA EL. 1V.40LT M40
COMMERCIAL LINE SUPPLY ELETTRICA WIDTH 400 MM	
SUPPLY ELETTRICA 400 MM	
WIDTH 400 MM	
DEPTH 900 MM	
HEIGHT 870 MM	
NET WEIGHT 38,400	
VOLUME 0,313 M3	
PACKAGING LENGTH 460,000	
PACKAGING WIDTH 1020,000	
PACKAGING HEIGHT 1150,000	
PACKAGING VOLUME 0,540	
PACKAGING GROSS WEIGHT 49,000	
POWER SUPPLY VOLTAGE STANDARD 380-415V 3N	
FREQUENCY 50-60 Hz	
ELECTRIC POWER 8,500 KW	
IPX PROTECTION IPX5	
CERTIFIED MODEL Q90CP/E400	
MINIMUM PRESSURE 150	
MAX PRESSURE 500	
TYPE 1 VASCA	
NUMBER OF MODULES 1/2 MODULO	







CR1018299

MODEL Q90CP/E400 SERIE QUEEN 9

ACCESSORIESES

CODE	MODEL	DESCRIPTION		
CR0999079	CCP12	CCP12 BASKET CP GN1/2 IMP. LATERAL		
CR0999089	CCP13L	CCP13L BASKET CP GN1/3 IMP. LATERAL		
CR0999099	CCP13F	CCP13F BASKET CP GN1/3 IMP. FRONTAL		
CR0999109	CCP16D	CCP16D BASKET CP GN1/6 IMP. RIGHT		
CR0999119	CCP16S	CCP16S BASKET CP GN1/6 IMP. LEFT		
CR0999129	CCP19	CCP19 BASKET CP GN1/9 IMP. FRONTAL		
CR0999149	GFCP40	BOTTOM GRID FOR TANK 40Lt.		
CR0999169	CVCP40	CVCP40 LIDS FOR CP TANK 40LT		
CR0999179	9KIT - A	KIT 2 GN1/3 STAINLESS STEEL BASKETS FRONT HANDLE + 1 GN1/3 BASKET		
CR0999189	9KIT-B	9KIT - B KIT BASKET PASTA-COOKERS		
CR0999199	9KIT-C	9KIT - C KIT BASKET PASTA-COOKERS		
CR0999209	9KIT - D	KIT 3 STAINLESS STEEL BASKETS GN1/3 SIDE HANDLES		
CR0999219	9KIT-E	9KIT - E KIT BASKET PASTA-COOKERS		
CR1018839	QP12	Base door L 400		
CR1018849	QKC11	KIT DRAWERS GN1/1 H150		
CR1015349	QRG11	SET OF TRY SLIDES GN 1/1		
CR0592770	ZA40	FRONT PLINTH		
CR0982789	ZL90	SIDE PLINTH SERIE 900		
MA97432000	NXR	SET OF WHEELS NXR		
MA97433000	NXRI	SET OF WHEELS INOX NXRI		
CR1015369	QCH20	DIRECTABLE WATER FLUE		
CR0592869	CR0592869	4 PIEDI X INSTALL.SU ZOCCOLO DI CEMENTO		
CR1015339	QPT	N. 4 PIEDINI IN ACCIAIO INOX PER INSTALLAZIONE SU PIANI		
CR0592879	CR0592879	KIT ANTI RIBALTAMENTO 2 PIEDI X N900		
CR0592399	NXTVT1	KIT PANNELLI X BASE TECN.1 FRONTE NXTVT1		
CR0592409	NXTVT2	KIT PANNELLI X BASE TECN.2 FRONTI NXTVT2		
CR1018879	Q90FTDX	FIANCO TERMINALE DESTRO QUEEN		
CR1018889	Q90FTSX	FIANCO TERMINALE SINISTRO QUEEN		
CR0980009	CANT	TUBULAR HANDRAIL FRONTALE (AL METRO LINEARE)		
CR0980019	9CLAT	TUBULAR HANDRAIL LATERALE SERIE 900		
BN418031900211	9PRD	PIANO LATERALE RIBALTABILE DESTRO		
BN418031900460	9PFD	PIANO LATERALE FISSO DESTRO		
BN418031900221	9PRS	PIANO LATERALE RIBALTABILE SINISTRO		
BN418031900470	9PFS	PIANO LATERALE FISSO SINISTRO		
BN418031900121	9KR	KIT STATIC WARMER		



1 BASIN ELECTRIC PASTA-COOKER 40 LT - WITH SET OF 3 BASKET GN1/3



CODE

CR1018299

MODEL Q90CP/E400 SERIE QUEEN 9



PRODUCT'S RANGE PLUS



Manual water filling



Safety pressure switch prevents heating if there is no water in the basin.





Equipment certified for low voltage directive 2014/35 / EU according to the international CB scheme.



Internal compartment not accessible for total safety in use, closed with a door for aesthetic alignment.



Thanks to the IPX5 water jet ingress protection rating, awarded after passing specific tests, knobs and knob bezels can be washed at the end of the working day without affecting performance or safety.



Safety pressure switch to prevent the activation of heating without water in tank.



The front bar is a comfortable place for the chef to lean on; it means you will remain at a safe distance from the worktop and therefore protects from accidentally knocking against both items lying on the worktop and the knobs.



In the electrical version, the heating element can be rotated by more than 90°.








CODE

CR1018299

MODEL Q90CP/E400 SERIE QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

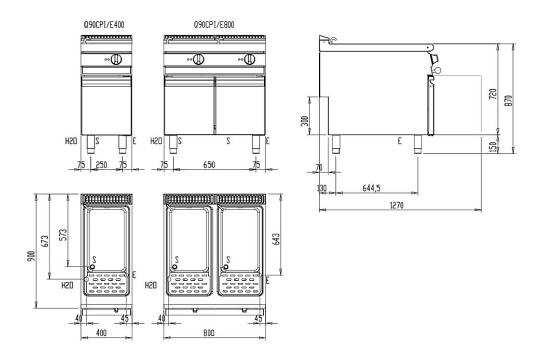

	Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda					
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Éntrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)			
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R1	H2O	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água			
S1	Scarico vasca - Wannenabílussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	100 / 101	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio Ø=1 cm			
S2	/alvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - /álvula de depressão		Rubinetto di livello - Level tap - Wasserhahn - Robinet de			
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto		niveau - Grifo de nivel - Niveaukraan - Torneira de nível			

1

