Project Rev.: Zone: Location:



CODICE MODELLO CR1659849T4W Q70MT/E800-T4W BARON 4.0

GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



TECHNICAL SPECIFICATIONS

Use in 7 functions: fry top / BRATT PAN / pasta cooker / slow cooking / steaming / kettle / bain-marie.

Control of cooking by core probe.

Management of 2 independent cooking zones using the D-CARE function that allows different temperatures to be set and alerts the operator if recipes are not compatible

Automatic water filling programmable in 3 different modes: automatic with litre counter, fast, slow.

Two USB outputs located under the dashboard (compartment area) for storing recipes and updating software.

Discharge of the product through a dedicated hole on a tray positioned on the on open cabinet becomes a quick and safe operation, without dangerous pouring or tipping of hot substances

Thanks to the G-Power system, you have the ability to manage the power delivered in a simple and customized way; the algorithm manages the power delivered in 4 + 100 variants.

Dedicated water drain with overflow

Internal memory for storing pre-set recipes, transferable to another device via USB.

Double-walled lid without perimeter seal.

info@baronprofessional.com

www.baronprofessional.com

Fry top: A cooking plate used to cook foods such as meat, fish, vegetables and eggs in a direct way.

Braising pan: Used to braise or cook meat, poultry, or vegetables ently in an aromatic liquid at a controlled temperature.

Pasta Cooker: An appliance designed to cook pasta in large quantities.

Slow cook: A low-temperature, slow-cooking method that allows meat, stews, soups, and other dishes to be cooked slowly in thermostatically controlled, eight-vacuum cooking for hours.

Steamer: An appliance used to cook food through steam, preserving nutrients and maintaining the texture and flavor of food.

Kettle: An appliance used to bring water to a boil guickly and efficiently.

Bain-marie: A cooking or holding technique that with placing a container of food over boiling water.





CODICE CR1659849T4W

MODELLO
Q70MT/E800-T4W

SERIE
BARON 4.0

Technical Information

MATERIALCR1659849T4WDEFINITIONQ70MA/E800 MULTI COOKER EL.TALENT BARONCOMMERCIAL LINEQUEENSUPPLYELECTRICSDIM. WIDTH800 mmDIM. PRODUCTIVITY700 mmDIM. HEIGHT870 mmNET WEIGHT0 KgVOLUME (net)0.244PACKAGE LENGTH860 mmPACKAGE WIDTH1020 mmPACKAGING HEIGHT1150 mmPACKAGE VOLUME1,009 m3GROSS PACKING WEIGHT0 KgSTANDARD POWER SUPPLY380-415V 3NFREQUENCY50-60 HzELECTRICAL POWER10 kWIP GRADEIPX5	SPECIFICATION	DATA
COMMERCIAL LINE SUPPLY ELECTRICS DIM. WIDTH 800 mm DIM. PRODUCTIVITY 700 mm DIM. HEIGHT 870 mm NET WEIGHT 0 Kg VOLUME (net) PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGE WIDTH 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	MATERIAL	CR1659849T4W
SUPPLY BLECTRICS DIM. WIDTH 800 mm DIM. PRODUCTIVITY 700 mm NET WEIGHT 870 mm NET WEIGHT 0 Kg VOLUME (net) PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGE WIDTH 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	DEFINITION	Q70MA/E800 MULTI COOKER EL.TALENT BARON
DIM. WIDTH DIM. PRODUCTIVITY 700 mm DIM. HEIGHT 870 mm NET WEIGHT 0 Kg VOLUME (net) PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 50-60 Hz ELECTRICAL POWER	COMMERCIAL LINE	QUEEN
DIM. PRODUCTIVITY 700 mm DIM. HEIGHT 870 mm NET WEIGHT 0 Kg VOLUME (net) 0.244 PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	SUPPLY	ELECTRICS
DIM. HEIGHT 870 mm NET WEIGHT 0 Kg VOLUME (net) 0.244 PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	DIM. WIDTH	800 mm
NET WEIGHT O Kg VOLUME (net) 0.244 PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	DIM. PRODUCTIVITY	700 mm
VOLUME (net) PACKAGE LENGTH 860 mm PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	DIM. HEIGHT	870 mm
PACKAGE LENGTH PACKAGE WIDTH 1020 mm PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	NETWEIGHT	0 Kg
PACKAGE WIDTH PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	VOLUME (net)	0.244
PACKAGING HEIGHT 1150 mm PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER	PACKAGE LENGTH	860 mm
PACKAGE VOLUME 1,009 m3 GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	PACKAGE WIDTH	1020 mm
GROSS PACKING WEIGHT 0 Kg STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	PACKAGING HEIGHT	1150 mm
STANDARD POWER SUPPLY 380-415V 3N FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	PACKAGE VOLUME	1,009 m3
FREQUENCY 50-60 Hz ELECTRICAL POWER 10 kW	GROSS PACKING WEIGHT	0 Kg
ELECTRICAL POWER 10 kW	STANDARD POWER SUPPLY	380-415V 3N
	FREQUENCY	50-60 Hz
IP GRADE IPX5	ELECTRICAL POWER	10 kW
	IP GRADE	IPX5




CODICE CR1659849T4W

MODELLO
Q70MT/E800-T4W

SERIE
BARON 4.0

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

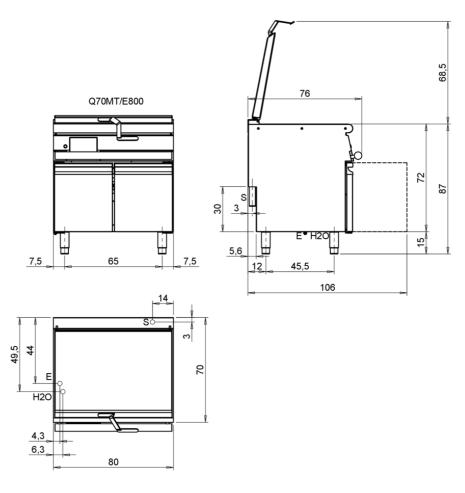

	Legenda - Legende - Key - Lége	ende	- Leyenda - Legenda
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
s	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção	
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba		alimentação água Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de dépresión - Onderdrukklep - Válvula de depressão		
S3	33 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de aqua		
	intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nivel
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		



CODICE CR1659849T4W

MODELLO
Q70MT/E800-T4W

BARON 4.0

PRODUCT'S RANGE PLUS



Control of cooking by core probe.



Automatic water filling with the possibility of programming litres.



Easy to understand and use Touch Screen control panel. Possibility of storing personal recipes.



Mains water drain with overflow drain and basin drain hole with sealing plug.



The PREHEAT function allows you to preheat the griddle in order to reactively cook dishes. by setting a set temperature, the equipment will set a higher temperature delta to compensate for the lowering due to the positioning of the dish



With the G-Power system, you have the ability to manage the power delivered by FitPan in an easy and customized way; the algorithm manages the power delivered in 4 + 100 variants.



Basin for draining the cooked product into the tank. Guaranteed cleanliness of the station and easy transport of products.



The ability to control 2 separate zones at different temperatures. 5 Armored heating elements high thermal resistance, maintain uniform and stable temperature over the whole surfacecie.





 CODICE
 MODELLO
 SERIE

 CR1659849T4W
 Q70MT/E800-T4W
 BARON 4.0

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1659899	BFTM	
CR1200169	GFMCF	Tank bottom grid
CR1659929	FSLM	
CR1200159	CPC1/3MCF	GN1/3 basket for pasta cooker
CR1659909	PMLM	
CR1200119	TSCMCF	Frame for slow cooking
CR1659919	PPRM	Food scoop in stainless steel
CR0956330	SDXP	Shovel
CR0999069	CRLMCF	Trolley for multifunctional
CR1200149	CV1/3MCP	GN1/3 steamer basket 160x280x115(H)cm
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud
CR1357499	4.0IOTPRO	PRO Subscription - Cloud