Project:
Rev.:
Zone:
Locations



CR0855879

MODEL 6NPC/IND411 SERIE 600

GENERAL FEATURES

A line of compact cooking appliances, designed for people whodo not want to give up on high performance, even in small spaces. Made of AISI 304 18/10 stainless steel, elegantly finished with Scotch Brite satin finish, it has rounded edges and capacious recessed areas; it is 600/650 mm deep and has a modular width of 400/600/700/800/1000 mm; the series comes complete with open base supports, with cupboards or refrigerated bases. The appliances can be easily put together to build a unit, that is compact, without any gaps thanks to a covering profile that guarantees protection against leaks and therefore excellent hygiene. High flues, ergonomic knobs mounted on a sloped control panel for better visibility, make this range easy to use from the very first time. All models are CE-approved.



TECHNICAL DETAILS

INDUCTION RANGE

INDUCTION RANGE 1 ZONE - TOP VERSION

Induction cookers with 1 cooking area (diam 220 mm) for 5kW of power per area. The energy regulating device allows you to set the temperature and a light indicates whether there is any residual heat on the top. The appliance is fitted with a device that detects the presence of the pan and an operating light. The hob is moulded from a single piece of AISI 304 18/10 stainless steel with Scotch Brite finish.





CODE CR0855879

6NPC/IND411

SERIE 600

TECHNICAL INFORMATION

SPECIFICATIONS	DATA
CODE	CR0855879
DEFINITION	INDUZIONE 1 ZONA 60 M40 6NPC/IND411
COMMERCIAL LINE	SERIE 600
SUPPLY	ELETTRICA
WIDTH	400 MM
DEPTH	600 MM
HEIGHT	295 MM
NET WEIGHT	10,400
VOLUME	0,071 M3
PACKAGING LENGTH	430,000
PACKAGING WIDTH	630,000
PACKAGING HEIGHT	390,000
PACKAGING VOLUME	0,106
PACKAGING GROSS WEIGHT	16,000
POWER SUPPLY VOLTAGE STANDARD	400V 3N
FREQUENCY	50/60 Hz
ELECTRIC POWER	5,000 KW
IPX PROTECTION	IPX3
CERTIFIED MODEL	6NPC/IND411
CERTIFICATION NUMBER	-





CR0855879

6NPC/IND411

SERIE 600

ACCESSORIESES

CODE	MODEL	DESCRIPTION
CR0858029	6P4D/S	PORTINA PER BASE 400
CR0858059	6P6D/S	PORTINA PER BASE 600
CR0858039	6P7D/S	SET 2 DOORS PER BASE 700
MA10405042000	6PIC4	SHELF FOR SUPPORTS
MA10405043000	6PIC6	SHELF FOR SUPPORTS
CR0858079	6PIC7	RIPIANO PER CAVALLETTO
MA10405099000	6PIC8	SHELF FOR SUPPORTS
CR0858149	C70X-GRFVS	CHROME GRID FOR OVEN 650 SERIES
CR0858159	C70X-TFVS	STAINLESS STEEL TRAY FOR OVEN
CR0858009	6CS 4	KIT DRAWERS PER BASE 400
CR0858049	6CS 60	KIT DRAWERS PER BASE 600
MA10405014900	6CGN	COPRIGIUNTO
MA10405016900	6FC4	BACK CHIMNEY
MA10405017900	6FC6	BACK CHIMNEY
CR0858019	6FC7	BACK CHIMNEY
6FC8	6FC8	CHIMNEY
CR0858069	6FC10	BACK CHIMNEY
6TVA4	6TVA4	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
6TVA6	6TVA6	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
6TVA8	6TVA8	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE
8012900010	BOT/2C	BOTTLE
CR0952459	6TBR12.1	FRAME FOR ALIGNMENT COMPARTMENT TO THE REFRIGERATED BASE





CODE

CR0855879

MODEL 6NPC/IND411

SERIE 600



The cooking areas are marked with a round silk-screen print with a diameter measuring 22cm (30 cm for the wok) and with a power of 5 kW for each area.



A device detects the presence of the pan and activates the heating. In case of anomalous use a special device stops it from operatingto prevent overheating.







CODE


CR0855879


MODEL 6NPC/IND411

SERIE 600

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALLACION -INSTALLATIESCHEMA - IINSTALLATIONSRITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

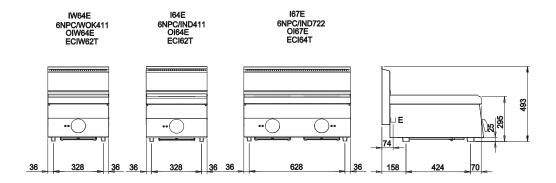

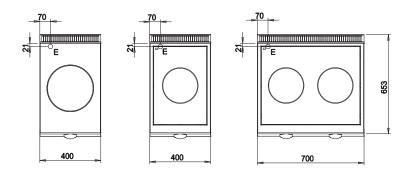

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel

1

