# RÔTISSERIE

## Performances 1160.8PE/PiE

#### DESIGN

The Performances range of rotisseries has been especially designed for high-volume cooking with high output and speed, while retaining excellent cooking quality. Well designed, user friendly and reliable the Performances is used by leading supermarkets and chain restaurants throughout the world.

Conscious of the high energy cost involved for our clients, the Performances rotisserie has energy saving infrared burners, patented by Rotisol. A wide array of accessories enable the rapid roasting of a variety of products.

#### **FEATURES**

- Energy efficient
- Tempered K-glass doors
- Independent motor for each spit
- Equipped with bottom drip tray with built-in drainage
- Reinforced and anti warping heating element
- Powerful halogen lamp
- Delivered with 8 prongless spits (CUI1160)
- Illuminated sign «Rotisserie»
- Base on casters with brakes

### TECHNICAL DETAILS

Overview of some of the standard features.



Independent motors adjustable in depth for each spit



Reinforced heating elements with stainless steel holders to keep them in place and removable stainless steel panels for easy cleaning.



Anti-scald K-glass reduces external thermal radiation (energy saving). Glass overlaps drip pan to keep splatters inside (anti-slip rotection).

Robust hinges designed for

heavy use, with integrated

locking in open and closed



1160.8PE Black enamel

C

Ô

0

SSERIF

Easy and protected access to the compartment of connections and electrical components.

Removable inside side-panels doubles protection from grease seeping into motors and other sensitive parts

#### ACCESSORIES

A variety of accessories are available. See video of available accessories and of vertical spit system online.

CUI1160 Anti-cutting prongless V-spit.		PID1160 Tray for unspit- ting.		BRC1160 Rectangular basket spit.	
BS1160 Spit for ham / turkey.	tett	BRRO1160 Roast-clamp spit.		BA1160 Lamb/suckling- pig spit.	
BCR1160 Spatchcock chicken basket.		DEC Spit mover.	N	<mark>AT</mark> Gas lighter.	

positions



## Performances

585


## 1160.8PE/PiE

Front view Rotisserie with roof (optional) and base on casters (optional)


1145


OTISSERIE

Side view Rotisserie with roof (optional) and base on casters (optional)



Rotisserie with roof (optional) and base on casters (optional)



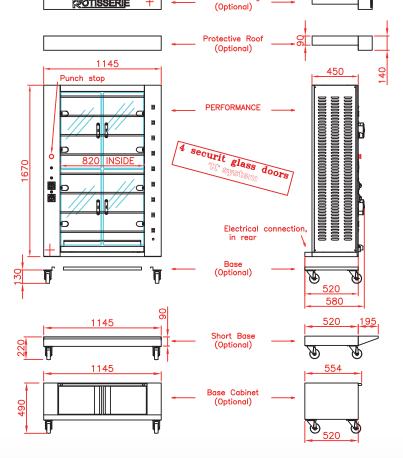

(lamps 2x25W)

Illuminated Sign



#### **SPECIFICATIONS**

Capacity	32/40 poultries		
Power supply	400 Volts 3 phases+neutral+earth		
Electrical power	22.59 kW		
Weight and size (HxDxW)	195 kg ; 1890 x 655 x 1145 mm		
Shipping weight and size	256 kg ; 2000 x 750 x 1210 mm		
Guarantee	1 year parts		

Rotisol S.A.S. Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE s.bennell@rotisol.com - Tel : +33 1 64 21 80 00 www.rotisol.com



