DESIGN

The new generation of "Rôti-Roaster" rotisseries allow professionals an optimal use with energy saving and respect for the environment as they are fully insulated. Highly technological but easy to use, they feature an automatic cooling of the heating turbines at the end of the cooking cycle. All accessories and inside panels are removable for ease of cleaning, while being reliable and meeting safety requirements.

Aware of the energy expense for its customers, Rotisol has implemented an energy saving program on its electrical products. Differences in consumption vary from 25 to 40% compared to competing products, for a faster and more economical performance.

FEATURES

- ☐ Control panel with 6 cooking programs. Pre-heating, alarm at end of cooking cycle and temperature maintenance (+ 63 ° C).
- ☐ Anti-burns and anti-radiation K.GLASS glass for energy savings (accelerated cooking), mounted on a removable silicone joint.
- ☐ Options: curved anti-burn double glass.
- ☐ Removable drip pan with drainage tap.
- □ 2 lights protected by a ceramic glass (flat surface for easy cleaning).
- ☐ Removable planetary central axis.
- ☐ Delivered with 16 baskets (BALD520).
- ☐ Optional: Banner with illuminated "Rotisserie" sign, choice of epoxy finish or all stainless steel.



TECHNICAL DETAILS

Overview of some of the standard features.



Heat diffused by turbine for a homogeneous distribution of the temperature in the cooking chamber.




Silicone gasket for sealing the door when closed.



6 cooking programs, alarm at end of cycle. Display and programming of cooking time and temperature.

ACCESSORIES

Many accessories are available. Videos of the accessories.





Rôti-Roaster


FBP16.520


Side view


Front view

Side view

Top view



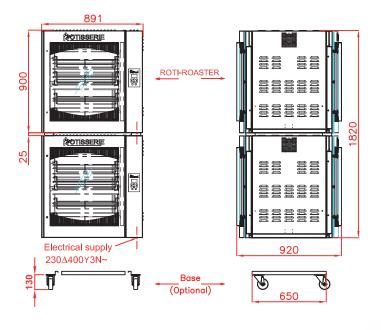



OTISSERIE

794 E = E

...





Revised: September 2016

SPECIFICATIONS

Capacity roasted chickens	48/64 poultries, 16 baskets
Capacity spatchcock chickens	40 poultries, 8 spatchcock chicken baskets
Power supply	400 V~50Hz/60Hz + earth
Electrical power	13 kW
Weight and size (HxDxW)*	353 kg ; 1950 x 920 x 891 mm
Shipping weight and size*	493 kg ; 2100 x 1030 x 1100 mm
Guarantee	1 year on parts
	1 year on parts

^{*} with a stand or base cabinet (optional)

DISTRIBUTOR / AGENT

FBP16.520

Rotisol S.A.S.Zone industrielle La Trei

Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE

<u>s.bennell@rotisol.com</u> - Tel: +33 1 64 21 80 00

www.rotisol.com