DESIGN

The new generation of "Rôti-Roaster" rotisseries allow professionals an optimal use with energy saving and respect for the environment as they are fully insulated. Highly technological but easy to use, they feature an automatic cooling of the heating turbines at the end of the cooking cycle. All accessories and inside panels are removable for ease of cleaning, while being reliable and meeting safety requirements.

Aware of the energy expense for its customers, Rotisol has implemented an energy saving program on its electrical products. Differences in consumption vary from 25 to 40% compared to competing products, for a faster and more economical performance.

FEATURES

- ☐ Control panel with 6 cooking programs. Pre-heating, alarm at end of cooking cycle and temperature maintenance (+ 63 ° C).
- ☐ Anti-burns and anti-radiation K.GLASS glass for energy savings (accelerated cooking), mounted on a removable silicone joint.
- ☐ Options: curved anti-burn double glass.
- ☐ Removable drip pan with drainage tap.
- □ 2 lights protected by a ceramic glass (flat surface for easy cleaning).
- ☐ Removable planetary central axis.
- ☐ Delivered with 16 baskets (BALD720).
- ☐ Optional: Banner with illuminated "Rotisserie" sign, choice of epoxy finish or all stainless steel.



TECHNICAL DETAILS

Overview of some of the standard features.



Heat diffused by turbine for a homogeneous distribution of the temperature in the cooking chamber.




Silicone gasket for sealing the door when closed.



6 cooking programs, alarm at end of cycle. Display and programming of cooking time and temperature.

ACCESSORIES


Many accessories are available. Videos of the accessories.





Rôti-Roaster

FBP16.720

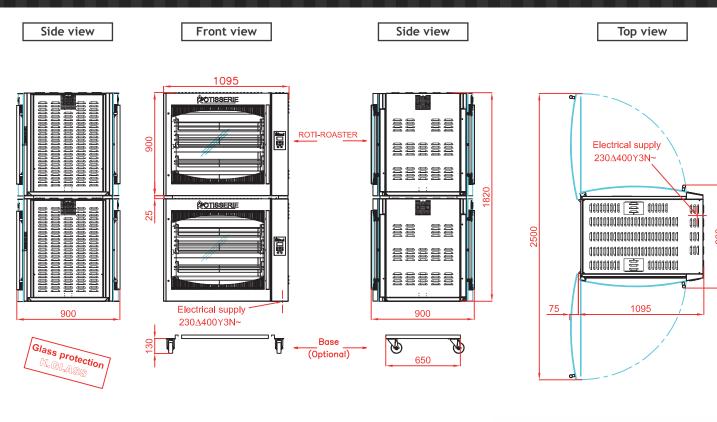

Origine / Origin C Europe

Revised: July 2014

SPECIFICATIONS

Capacity roasted chickens	64/80 poultries, 16 baskets
6 " 1 1 1 1 1	FC III O III I I I I
Capacity spatchcock chickens	56 poultries, 8 spatchcock chicken baskets
	400 M FOLL 440 M
Power supply	400 V~50Hz/60Hz + earth
	4=134
Electrical power	17 kW
Waight and sine (UVDVM)*	401 kg + 10E0 y 020 y 100E mm
Weight and size (HxDxW)*	401 kg ; 1950 x 920 x 1095 mm
Shipping weight and size*	471 kg; 2100 x 1030 x 1230 mm
Stribbilis Meight and 2156	4/ 1 kg , 2100 x 1030 x 1230 111111
Guarantee	1 year on parts
Guarantee	i year on parts

^{*} with a stand or base cabinet (optional)

DISTRIBUTOR / AGENT

FBP16.720

XOTISSERIE

:::

Rotisol S.A.S.

Zone industrielle La Trentaine, Avenue Gustave Eiffel 77507 Chelles cedex - FRANCE

s.bennell@rotisol.com - Tel: +33 1 64 21 80 00

www.rotisol.com