

Modular Cooking - Grandis

Electric - Fryer

NEF 4-90 GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric fryer with 900 mm depth for double baskets use and heated with 21 kW heater. Equipped with swing door.

Usable for deep frying.

Made of AISI 304 with 2 mm top thickness, temperature controlled, fully welded single fryer tank for single basket with oil capacity of 21 liters, includes tank cover, oil drain kit, crumb filter and hook for lifting heater.

OTHER AVAILABLE MODELS

- NEF 6-90 GR
- NEF 8-90 GR

MAIN FEATURES

- Powered with 21 kW incoloy heater.
- Oil capacity of 21 liters
- Heater can be tilted for access of cleaning of the tank.
- Fully welded fryer tank constructed from AISI 304.
- Drain valve with 3/4" on the cabinet provided
- Temperature control from 100 degree Celcius to 190 degree Celcius.
- Thermal-cut off when overheated.

CONSTRUCTION

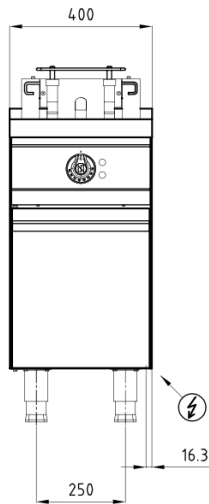
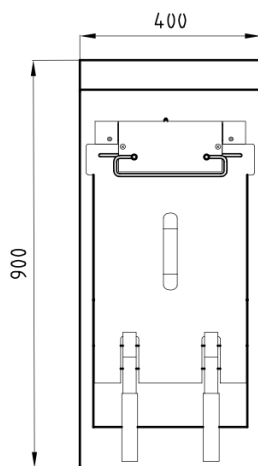
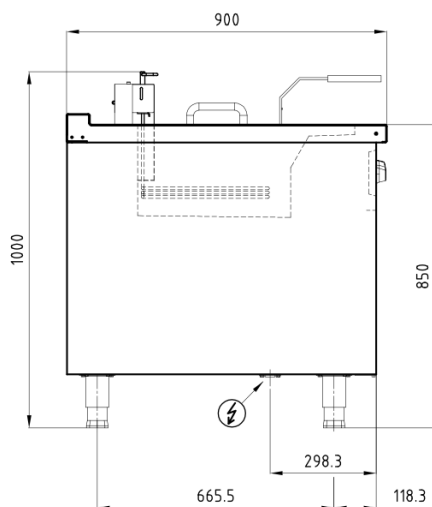
- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Tubular, height adjustable (-3...+50 mm) stainless steel legs.
- Cabinet executed with H2 radius.
- IPX4 water protection level.

INCLUDED ACCESSORIES

- Crumb filter.
- Oil drain kit and tank cover.
- Joint clip GR.

OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 6 mm) p/mtr.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 400 mm
Depth	: 900 mm
Height	: 850/1000 mm

Cooking Surface

Cooking zones	: 21 liters, 340 x 430 mm
Heating zones	: 1
Control type	: Modulating temperature control

Electrical Supply Data

Total connected load	: 21 kW
Voltage	: 400V, 3PNE AC /50-60Hz
Recommended fuse	: 40 A (slow)

Connections

Water	: N/A
Drain	: DN 20 (3/4")

Heat & Steam Emissions

Direct heat emission	: 1.89 kW
Latent heat emission	: 14.7 kW
Steam emission	: 21.63 kg/h

PACKAGING DATA

Width	: 430 mm
Depth	: 930 mm
Height	: 1150 mm
Volume	: 0.46 m ³

WEIGHT

Net Weight	: 66 kg
Gross Weight	: 107 kg