

Modular Cooking - Grandis

Electric - Pasta Cooker

NEPC 4-90 GR



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Modular electric pasta cooker with 900 mm depth, powered with 12 kW electropolished incoloy heaters. Equipped with swing door.

Usable for cooking pasta and noodle. Can be used as an alternative to warm up food.

Made of AISI 304 with 2 mm top thickness, temperature controlled, pasta tank is deep drawn for uncompromised hygiene, the tank and the heaters are made of electropolished AISI 316 for resistance against acidic substance.

OTHER AVAILABLE MODELS

- N/A

MAIN FEATURES

- Powered with 2 x 6 kW electropolished incoloy heaters.
- Deep drawn pasta tank with 40 liters capacity is made of electropolished AISI 316 to improve its resistance against acidic substance.
- Manual water filling system with integrated knob on the front panel.
- Thermal-cut off when overheated.

CONSTRUCTION

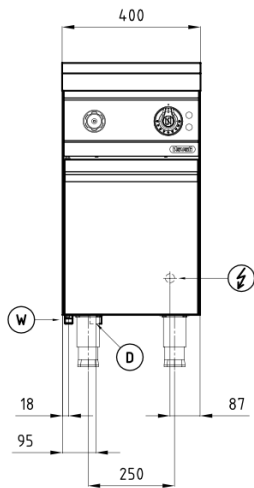
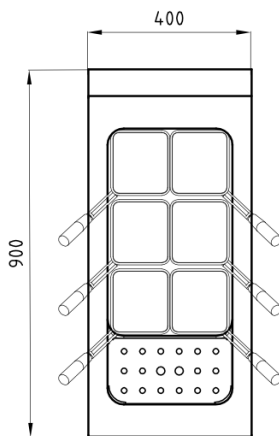
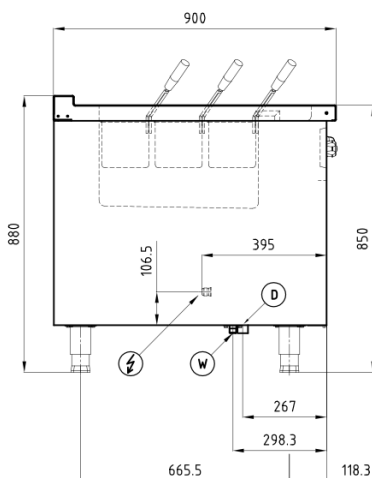
- External construction entirely with AISI 304.
- Top panel with 2 mm thickness. Orbital surface finishing: resistant toward scratches.
- Front panel is constructed of 1 mm AISI 304 with satin surface finish.
- Side panel is constructed of 0.8 mm AISI 304 with satin surface finish.
- Tubular, height adjustable (-3...+50 mm) stainless steel legs.
- Cabinet executed with H2 radius.
- IPX4 water protection level.

INCLUDED ACCESSORIES

- Grandis joining clip.
- Overflow perforated cover.
- Swing door.

OPTIONAL ACCESSORIES

- Power cable, H07RN-F (5 x 2.5 mm) p/mtr.
- Pasta basket 1/3 - 1 handle.
- Pasta basket 1/3 - 2 handles.

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 400 mm
Depth	: 900 mm
Height	: 850/880 mm

Cooking Surface

Cooking zones	: 40 liters, 308 x 510 mm
Heating zones	: 1
Control type	: Modulating temperature control

Electrical Supply Data

Total connected load	: 12 kW
Voltage	: 400V, 3PNE AC /50-60Hz
Recommended fuse	: 20 A (slow)

Connections

Water	: DN 15 (1/2")
Drain	: DN 25 (1")

Heat & Steam Emissions

Direct heat emission	: 0.42 kW
Latent heat emission	: 2.4 kW
Steam emission	: 3.53 kg/h

PACKAGING DATA

Width	: 430 mm
Depth	: 930 mm
Height	: 1000 mm
Volume	: 0.40 m ³

WEIGHT

Net Weight	: 49 kg
Gross Weight	: 65 kg