




Total Food-Service Solutions

Modular Cooking –Salamander

Electric Salamander

NES 4000 T

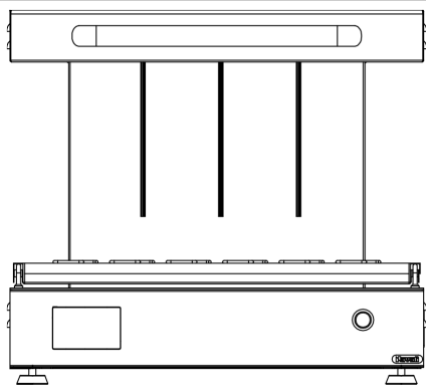

*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NES 4000 T

DESCRIPTION

Electric Salamander with 3.6 kW power rate. Table top model. Removable chromed steel cooking grid and grease collection container. Rapid heat-up time. Adjustable top with 2 heating elements, individually controlled heating zones. Three sides access. Touch screen control to set cooking time.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

MAIN FEATURE

- Two heating zones of 3.6 kW total.
- Rapid heating quickly reaches maximum heat.
- Height adjustable heating element.
- Removable chromed steel cooking grid.
- Removable fat collection container.
- Touch screen control to set the cooking time.
- Heating zone management (25%, 50%, or 100%).
- Three side access design.
- Left and right support runners and stopper.

CONSTRUCTION

- 304 AISI Stainless Steel construction throughout.
- Separate temperature control of heating zones.
- Two heating elements on the top can be moved vertically to guarantee perfect result.

INCLUDED ACCESSORIES

- Cooking Grill

OPTIONAL ACCESSORIES

- Power Cable

APPROVAL : _____


PT. NAYATI INDONESIA
www.nayati.com
nayati@nayati.com

The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2018.02.15




Modular Cooking –Salamander
Electric Salamander
NES 4000 T


FRONT

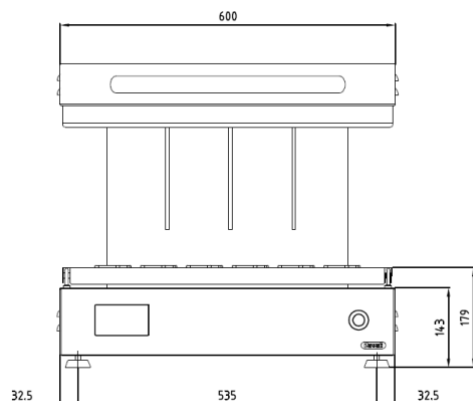

TOP

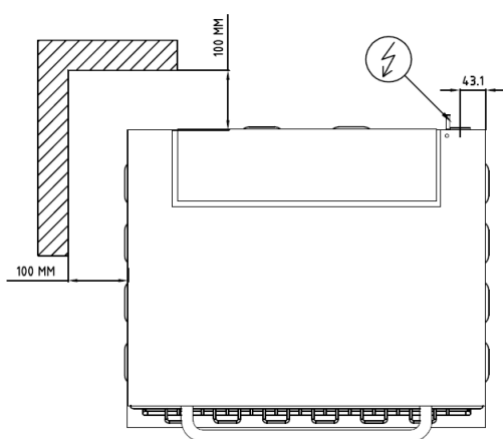

SIDE

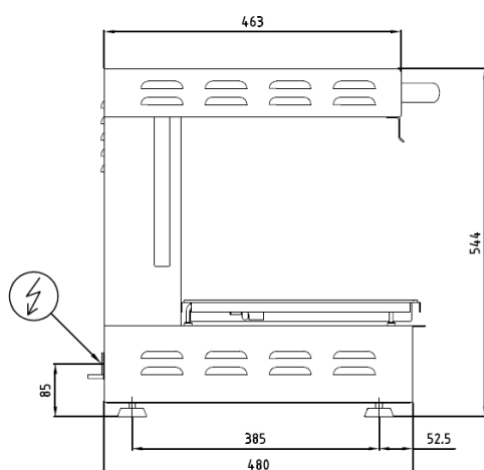

* Overall Dimension in mm

ELECTRIC

Electrical rating (kW):	3.6 kW
Element rating (kW) :	3.6 kW
Electrical supply voltage :	230V 1N
Required electrical supply (amps):	16
Electrical current split (amps) :	16

KEY INFORMATION

Cooking surface :	475 x 365 mm
Direct heat emission :	2.80 kW
Latent heat emission :	0.63 kW
Steam emission :	0.93 kg / h
Number of heaters :	2
Gross / Net weight :	74 61 kg
Shipping height :	680 mm
Shipping width :	670 mm
Shipping depth :	600 mm
Shipping volume :	0.273 m ³

APPROVAL

PT. NAYATI INDONESIA
www.nayati.com
nayati@nayati.com

The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2018.02.15