

Modular Cooking – Meritus 750 Electric Tilting Pan

NETP 8-75 MR



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NETP 8-75 MR

DESCRIPTION

Electric Tilting Pan with 7.8 kW power rate. Operation temperature maintained by thermostat with maximum working temperature of 300°C, unit to be installed on closed cabinet, cantilever, or solid block solutions. Featuring removable clip joint to connect Meritus family product.

ITEM#	:
MODEL#	:
NAME	:

MAIN FEATURE

SN

- Maximum working temperature of 300°C
- Unit to be installed free standing, can be joined with cabinet or cantilever system.
- 43 Liters Pan Capacity.
- Manual Tilting Operation.
- 10 mm Thick Braising Pan SS420.
- Service maintenance can be done from the front cabinet.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable ±25 mm Stainless Steel leg.
- Certified IPX4 protection.

INCLUDED ACCESSORIES

• N/A

OPTIONAL ACCESSORIES

• Clip Plate for Joining

APPROVAL

PT. NAYATI INDONESIA www.nayati.com nayati@nayati.com The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2018.06.25

ELECTRIC

FRONT

8

TOP

800

(2)

100 mm

Electrical rating (kW) 7.8 Element rating (kW) 7.8

Electrical supply voltage 400V 3N

Required electrical supply (amps): 12

KEY INFORMATION

Unit dimension (WxDxH) 800x750x850 mm

Cooking surface (WxD) 585x425 mm

Direct heat emission 4.59 kW

Latent heat emission 4.08 kW

6.0 kg/h Steam emission

50°C Min. working temperature

300°C Max.working temperature

Capacity Max 43 L

Net weight 118 kg

PACKING DETAILS


Shipping width 870 mm

Shipping depth 940 mm

Shipping height 1060 mm

Shipping volume 0.866 m³

Gross weight 134 kg

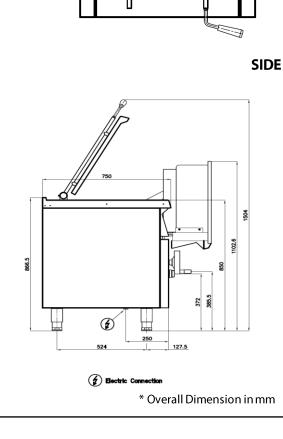

APPROVAL