




Total Food-Service Solutions

Modular Cooking – Meritus 750

Gas Fry Top

NGFT 6-75 MR



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NGFT 6-75 MR

DESCRIPTION

Gas Fry Top with 10 kW power rate. There are three available choices with smooth, groove or combi griddle plate. Working temperature maintained by thermostat with maximum working temperature of 280°C. Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring removable clip joint to connect Meritus family product.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

MAIN FEATURE

- Splash Back included for hygienic operation.
- Smooth, Half Grill, or Full Grill execution.
- Welded fry top to prevent dirt to get inside the heating compartment.
- Unit to be installed free standing, can be joined with base cabinet, table stand or cantilever system.
- Service maintenance can be done from the front panel.

CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable ± 25 mm Stainless Steel leg.
- Certified IPX4 protection.
- Material Griddle is SS420 (t = 20mm).

INCLUDED ACCESSORIES

- Extra Nozzle

OPTIONAL ACCESSORIES

- Clip plate for joining

APPROVAL : _____




PT. NAYATI INDONESIA
www.nayati.com
nayati@nayati.com

The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2018.07.05




Modular Cooking – Meritus 750
Gas Fry Top
NGFT 6-75 MR


FRONT

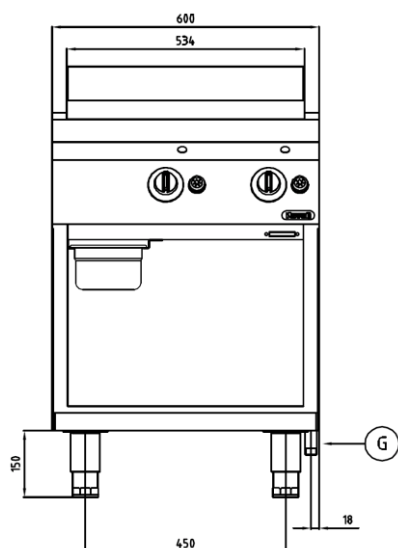

TOP

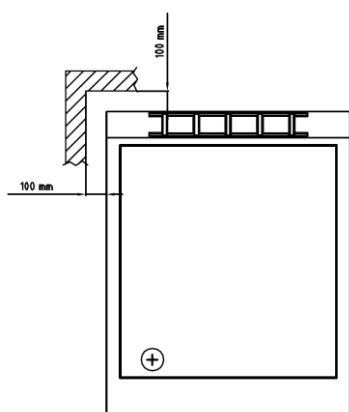

SIDE

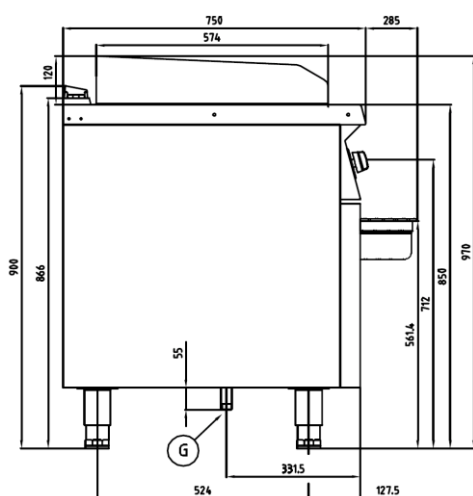

* Overall Dimension in mm

GAS

Gas Power	:	10 kW (8,600 kCal/h)
Gas Type Option	:	G30/G31, G20
Gas Inlet	:	R ¾"
Natural Gas-Pressure	:	G20: 20 mbar
LPG Gas Pressure	:	28-30 mbar/ 37 mbar

KEY INFORMATION

Cooking Surface (WxD)	:	730x570 mm
Direct Heat Emission	:	3.50 kW
Latent Heat Emission	:	4.00 kW
Steam Emission	:	5.88 kg / h
Min. Working Temperature	:	120° C
Max. Working Temperature	:	280° C
Net Weight	:	83 kg
Shipping Height	:	1010 mm
Shipping Width	:	660 mm
Shipping Depth	:	840 mm
Shipping Volume	:	0.56 m ³

APPROVAL
