




Total Food-Service Solutions

## Modular Cooking – Meritus 750

### Gas Fry Top

#### NGFT 8-75 MR

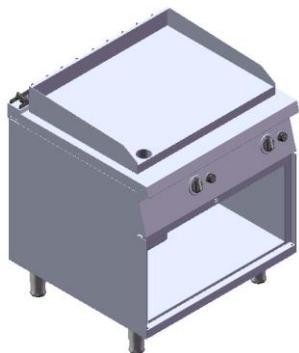

\*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

#### AVAILABLE MODEL

1. NGFT 8-75 MR

#### DESCRIPTION

Gas Fry Top with 14 kW power rate. There are three available choices with smooth, groove or combi griddle plate Working temperature maintained by thermostat with maximum working temperature of 280°C. Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring removable clip joint to connect Meritus family product.

ITEM# : \_\_\_\_\_

MODEL# : \_\_\_\_\_

NAME : \_\_\_\_\_

SN : \_\_\_\_\_

#### MAIN FEATURE

- Splash Back included for hygienic operation.
- Smooth, Half Grill, or Full Grill execution.
- Welded fry top to prevent dirt to get inside the heating compartment.
- Unit to be installed free standing, can be joined with base cabinet, table stand or cantilever system.
- Service maintenance can be done from the front panel.

#### CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable  $\pm 25$  mm Stainless Steel leg.
- Certified IPX4 protection.
- Material Griddle is SS420 (t = 20mm).

#### INCLUDED ACCESSORIES

- Extra Nozzle

#### OPTIONAL ACCESSORIES

- Clip plate for joining

APPROVAL : \_\_\_\_\_




PT. NAYATI INDONESIA  
[www.nayati.com](http://www.nayati.com)  
[nayati@nayati.com](mailto:nayati@nayati.com)

The company reserves the right to make modifications to the products without prior notice.  
All information correct at time of printing.  
2018.06.23




Modular Cooking – Meritus 750  
Gas Fry Top  
NGFT 8-75 MR


**FRONT**

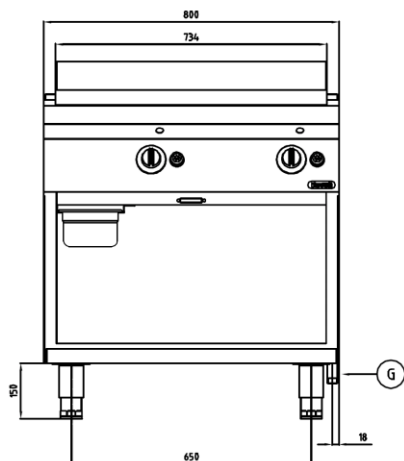

**TOP**

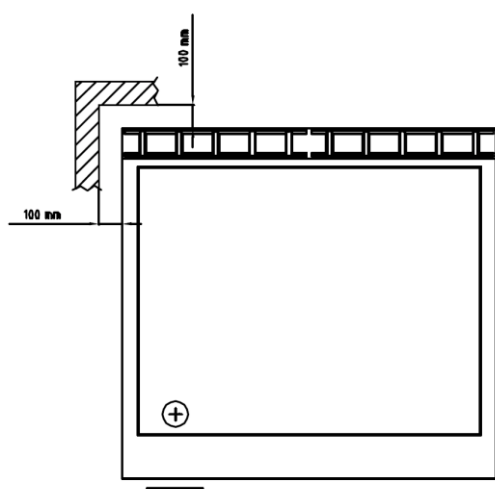

**SIDE**

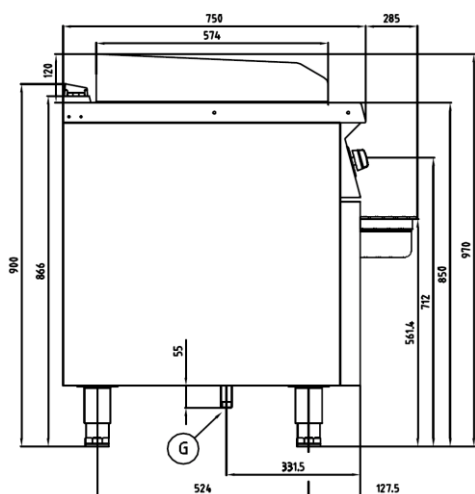

\* Overall Dimension in mm

**GAS**

Gas Power	:	14 kW (12,040 kCal/h)
Gas Type Option	:	G30/G31, G20
Gas Inlet	:	R 3/4"
Natural Gas-Pressure	:	G20: 20 mbar
LPG Gas Pressure	:	28-30 mbar/ 37 mbar

**KEY INFORMATION**

Cooking Surface (WxD)	:	730x570 mm
Direct Heat Emission	:	4.90 kW
Latent Heat Emission	:	5.60 kW
Steam Emission	:	8.23 kg / h
Min. Working Temperature	:	120° C
Max. Working Temperature	:	280° C
Net Weight	:	108 kg
Shipping Height	:	1000 mm
Shipping Width	:	860 mm
Shipping Depth	:	840 mm
Shipping Volume	:	0.722 m <sup>3</sup>

**APPROVAL**

\_\_\_\_\_