



Total Food-Service Solutions

Modular Cooking – Oriental

Gas Wok Range

NGK 40/S



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NGK 40/S

DESCRIPTION

Gas Wok Range with 33 kW power rate. Sturdy, compact, and suitable for various methods of cooking. The Nayati Low-Pressure Wok Range is perfect for every kind of kitchen and facility. The unit is equipped with a heavy-duty removable wok ring, durable cast iron burner and a waterspout guaranteeing high-performance cooking and easy cleaning.

ITEM# : _____

MODEL# : _____

NAME : _____

SN : _____

MAIN FEATURE

- Powerful burner reinforced with efficient atmospheric burner.
- Unit to be installed free standing.
- Slanted top panel, ensuring water to go in to the back drain.
- Equipped with top panel cooling water system.
- Gas Setting can be used with LPG or LNG.

CONSTRUCTION

- All Exterior panel is stainless steel.
- Full weld top panel of the wok for maximum hygiene.
- Top mounted by 1.2mm of Stainless Steel.
- Adjustable ± 25 mm Stainless Steel leg.

INCLUDED ACCESSORIES

- N/A

OPTIONAL ACCESSORIES

- N/A



APPROVAL : _____


PT. NAYATI INDONESIA
www.nayati.com
nayati@nayati.com

The company reserves the right to make modifications to the products without prior notice.
All information correct at time of printing.
2019.02.13




Modular Cooking – Oriental
Gas Wok Range
NGK 40/S


FRONT

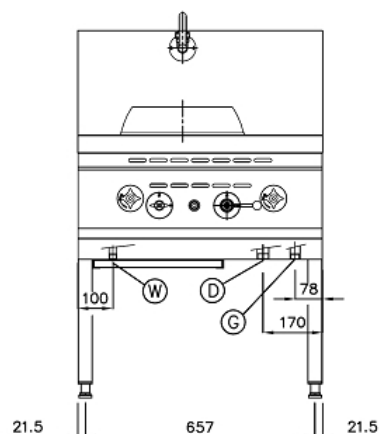

TOP

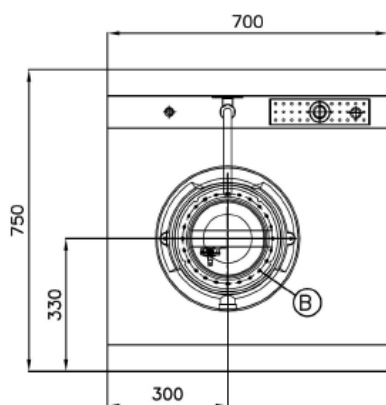

SIDE

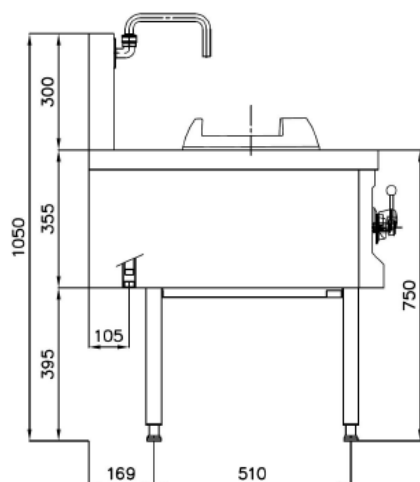

GAS

Gas Consumption	:	33 kW (28,380 kCal/h)
Gas Type Option	:	G20,G25,G30/G31
Gas Connection	:	3/4"
LPG Gas Pressure	:	G30: 28 mbar

KEY INFORMATION

Unit dimension (WxDxH)	:	700x750x750/1050 mm
Cooking surface	:	Ø 280 mm
Number of Burner	:	1
Nett weight	:	64 kg

PACKING DETAILS

Shipping width	:	890 mm
Shipping depth	:	750 mm
Shipping height	:	1230 mm
Shipping volume	:	0.821 m ³
Gross weight	:	82 kg