

Asian Cooking - Electric Steamer
Electric - Dim Sum Steamer / Slim
NEDS 6-75



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Compact electric steamer with nine dim sum trays steaming capacity. Equipped with high-efficient heaters with a total of 18 kW connected load.

Equipped with a salt-resistant water tank with a volume of 27 liters for continuous steam, intended to use with Bamboo trays Ø 130 mm. Cold-water supply with automatic water tank filling by the faucet.

Due to the compact design, the NEDS steamer is the perfect choice for any Asian restaurants with a smaller footprint.

OTHER AVAILABLE MODELS

- NGDS 6-75

MAIN FEATURES

- High-efficient heaters with a total connected load of 18 kW.
- Automatic water filling system.
- Usable for bamboo trays of Ø 130 mm
- Three level rotary switch with control knobs and function indication lights.
- Salt-resistant, stainless steel tank of 27 liters with drain valve.
- CE certified unit.

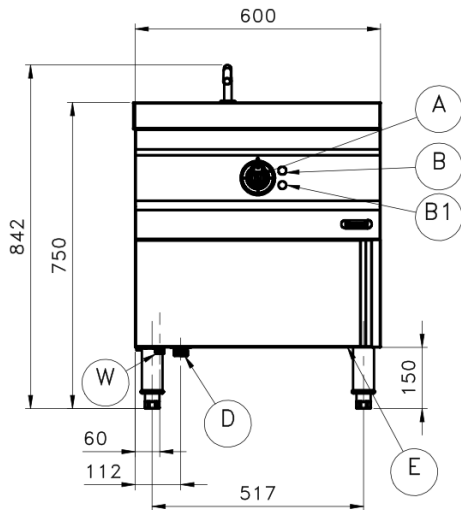
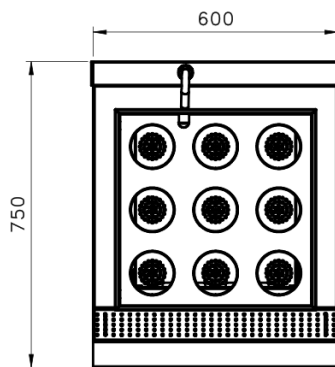
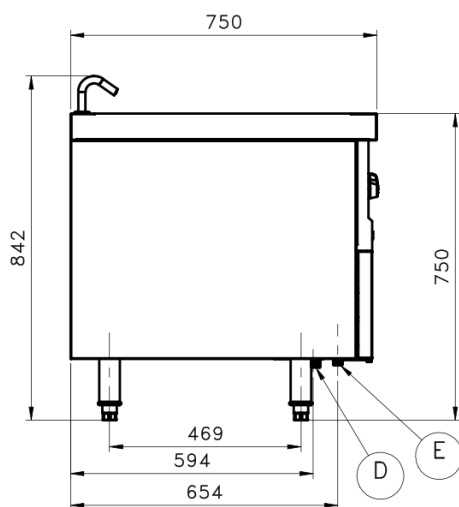
CONSTRUCTION

- Sturdy frame made of stainless steel AISI 430.
- Stainless steel top panel (1.2 mm), AISI 304 with orbital surface pattern.
- Front panel and side panels (0.8 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Backsplash made of stainless steel AISI 304 with hairline surface pattern (1.2 mm).
- Tubular, height adjustable (-3...+50 mm) stainless steel legs.
- Types of installations: free standing.
- Frame, top and panels, all made of high-grade stainless steel.

INCLUDED ACCESSORIES

- Dim sum plate with nine holes.
- Power cable type: H07RN-F (5 x 4 mm²).

OPTIONAL ACCESSORIES

FRONT**TOP****SIDE**

*Overall dimension in mm

TECHNICAL DATA**External Dimensions**

Width	: 600 mm
Depth	: 750 mm
Height	: 750/1050 mm

Cooking Surface

Cooking zones	: 27 liters, 470 x 470 mm
Heating zones	: 1 x 18 kW
Control type	: Modulating temperature control

Electrical Supply Data

Total connected load	: 18 kW
Voltage	: 400V, 3PNE AC /50-60Hz
Recommended fuse	: 32 A (slow)

Connections

Water	: DN15 (1/2")
Drain	: DN25 (1")

Heat & Steam Emissions

Direct heat emission	: 2.16 kW
Latent heat emission	: 3.24 kW
Steam emission	: 4.77 kg/h

PACKAGING DATA

Width	: 630 mm
Depth	: 780 mm
Height	: 1170 mm
Volume	: 0.57 m ³

WEIGHT

Net Weight	: 70 kg
Gross Weight	: 86 kg

PT. NAYATI INDONESIAwww.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

7/11/2025