



# KNL4 8000 - ADV1669

### **TECHNICAL SPECIFICATIONS** 360mm x 360mm x 70.5mm **Cooking block** dimensions To be integrated into the worktop 360mm x 360mm Cooking surface Glass ceramic thickness 6mm 8000W (4 inductors of 2000W) **Power** Touch-sensitive keyboard with joystick **Controls** and displays **Amperage** 12A The No Limit innovation is based on the principle: 1 inductor = 1 zone. 4 coils / 4 cooking zones, controlled by touch-sensitive keypad with 1 joystick and 4 displays 4-digit. **Functions** Adjustable power and temperature: L'Original - Power adjustment - 30 levels from 25 to 2000W per inductor - Temperature setting from 30°C to 250°C in 1°C steps Integrated programme function with 3 memory settings 380V Three-phase 50-60Hz **Power supply** Compatible with TERA WATT and SI-COTRONIC energy optimisers. **Diameter** Minimum 6 cm saucepan Complies with current European stan-**Standards** dards on the safety of electrical equipment, EMC, Rohs and SGS - 1 Cooktop - 1 Generator block - 1 Knob control Kit composition - 1 Integration frame (406 x 406mm) - Connecting cables 1m50 (Custom connection cables available in 3, 5, 6, 8, 10, 12, 15m)








### Features KNL4

The No Limit KNL4 hob has 4 cooking zones with adjustable power or temperature. Each cooking zone can be controlled independently:

- 4 Cooking zones
  - 4 Inductors
- 1 Control for each cooking zone

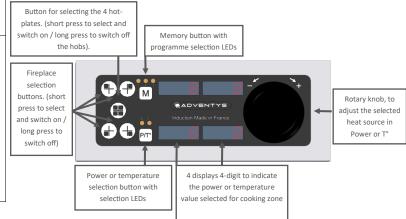

#### **ADVENTYS**

Route de Pagny - 21250 Seurre - France www.adventys.com contact@adventys.com T: 03.80.20.46.15

Importante Note

Adventys reserves the right to change specifications without notice.

















# KNL4 8000 - ADV1669


# Cooking block dimensions






Integrated cooking unit dimensions: 366mm x 366mm


## Dimensions Control panel (250x 120)





Built-in dimensions control 215 x 88 mm + 4 holes R4,5mm

### Generator dimensions

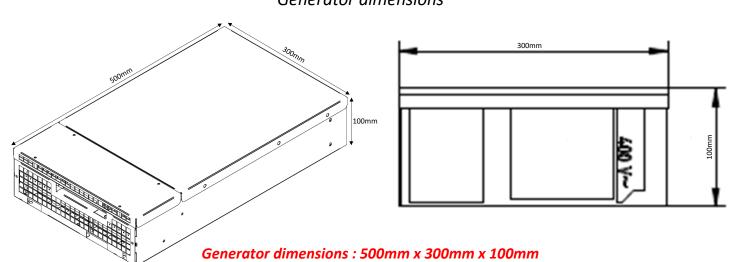

#### **ADVENTYS**

Route de Pagny - 21250 Seurre - France www.adventys.com contact@adventys.com T: 03.80.20.46.15

Importante Note

Adventys reserves the right to change specifications without notice.











