
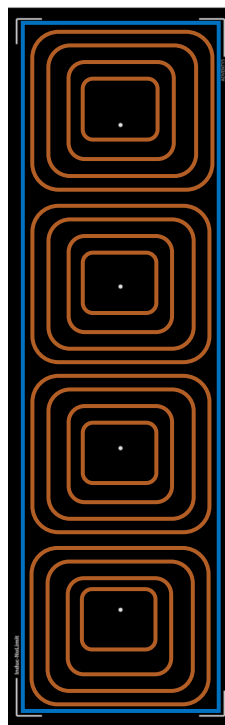


TECHNICAL SPECIFICATIONS

Cooking block dimensions	690mm x 220mm x 70.5mm To be integrated into the worktop
Cooking surface	690mm x 220mm Glass ceramic thickness 6mm
Power	8000W (4 inductors of 2000W)
Controls	Knob control with display
Amperage	12A
Functions Click Clack	1 cooking zone / 4 coils, controlled by 1 joystick and 4-digit display (a single setting for 4 coils). Adjustable power and temperature : Power control - 30 levels from 25 to 2000W per inductor - Temperature setting from 30°C to 250° C in 1°C steps Switch from power mode to temperature mode by turning the knob twice
Power supply	380V Three-phase 50-60Hz Compatible with TERA WATT and SICOTRONIC energy optimisers.
Diameter saucepan	Minimum 6 cm
Standards	Complies with current European standards on safety of electrical equipment, EMC, Rohs and SGS.
Kit composition	- 1 Cooktop - 1 Generator block - 1 Commande - 1 Knob control (736 x 266mm) - Connecting cables 1m50 (Custom connection cables available in 3, 5, 6, 8, 10, 12, 15m)


Click Clack

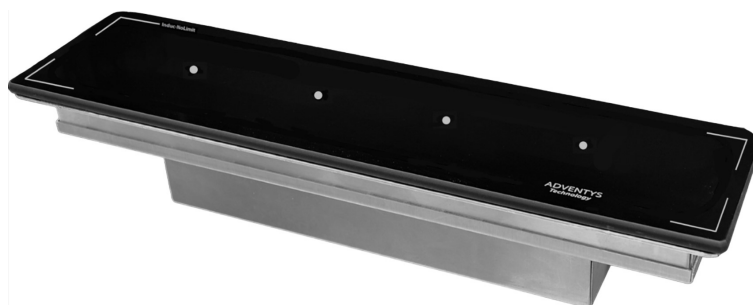

Features KNLSP

The KNLPT No Limit hob has 1 cooking zone with adjustable power or temperature. This cooking zone has 4 inductors :



- 1 cooking zone
- 4 Inductors
- 1 Cooking zone control

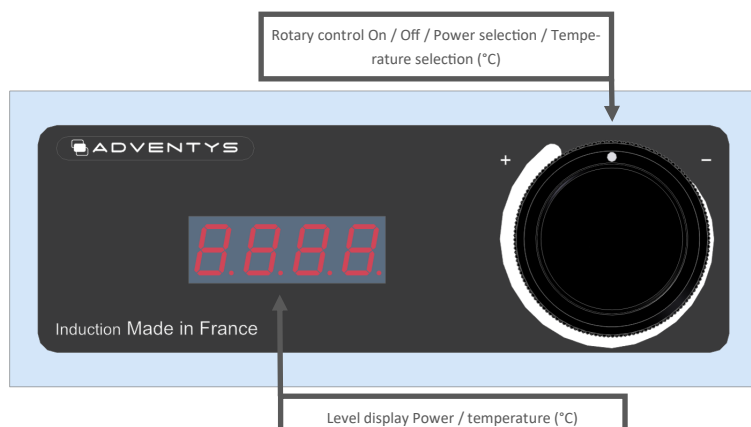

ADVENTYS
 Route de Pagny - 21250 Seurre - France
 www.adventys.com
 contact@adventys.com
 T: 03.80.20.46.15



Important note
 Adventys reserves the right to change specifications without notice.

Cooking block dimensions

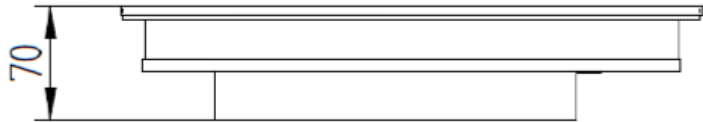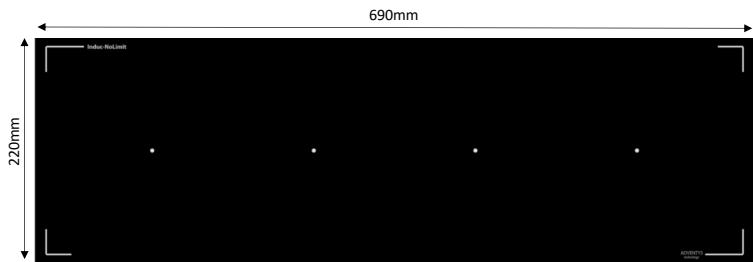



Integrated cooking unit dimensions : 696mm x 226mm

Dimensions Control panel

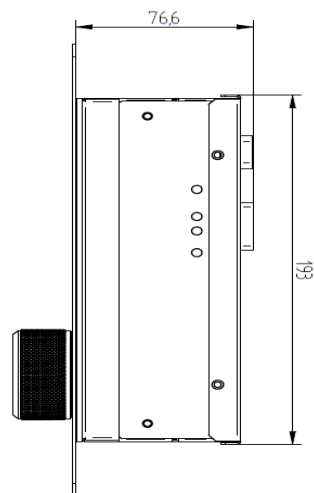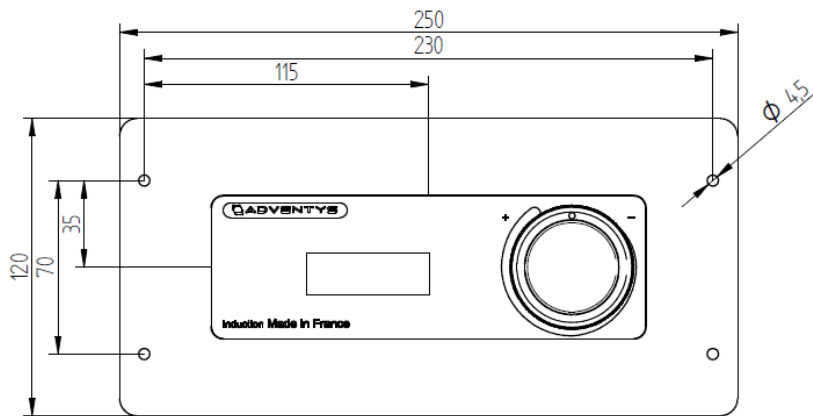

Integrated cooking unit dimensions : 215 x 88 mm + 4 holes R7mm

Generator dimensions

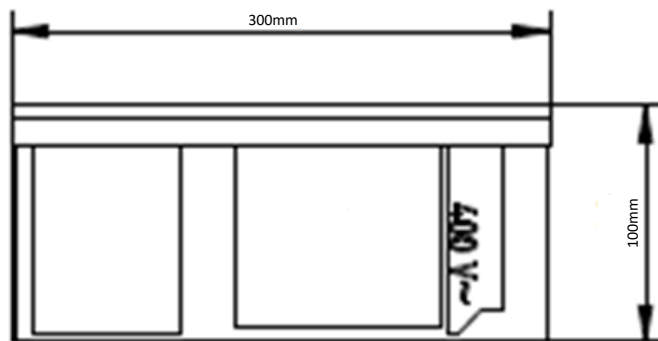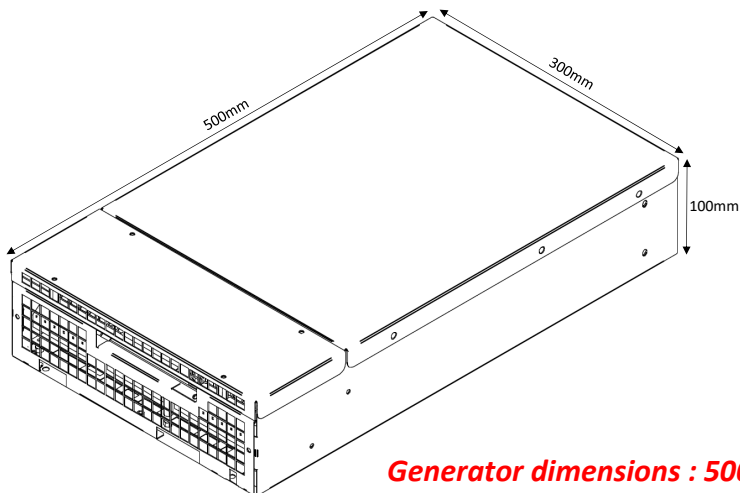

Generator dimensions : 500mm x 300mm x 100mm

ADVENTYS
 Route de Pagny - 21250 Seurre - France
www.adventys.com
contact@adventys.com
 T: 03.80.20.46.15

Important note
 Adventys reserves the right to change specifications without notice.