

Modular Cooking – Oriental

Gas Euro Range

NGER 13-70



*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

AVAILABLE MODEL

1. NGER 13-70

DESCRIPTION

Wok Super Range with Double Cooking Zone. Versatile as Open Burner, Pot Cooker, or Wok Open Burner. Higher Power Burner and Higher Splash Back compared to NGER 60 Series. Designed with only 700 mm depth. Constructed with deep drawn wok with cast iron of pot holder and combined with wok holder adapter. Dust Collection Drawer included below the front panel for hygiene cleaning operation. Compatible installation with others 70 Wok Super Range Series.

ITEM# :		

MODEL#

NAME

SN

MAIN FEATURE

- Gas Appliance supplied with G20 and G30/G31 components as standard.
- Gas system is equipped by safety device (thermocouple, failure function and gas filter).
- Iron Cast Wok Support to fit variety diameters of
- Wok Oil collecting drawer provided.
- Dual Functions (Pan Cooking Ring and Wok).
- Unit to be installed free standing.

CONSTRUCTION

- All exterior panels is constructed of Stainless Steel.
- Adjustable ±25 mm Stainless Steel leg.


INCLUDED ACCESSORIES

- Ignition hand lighter.
- Wok holder.

OPTIONAL ACCESSORIES

N/A





GAS

Gas Consumption (G20) 26 Kw

(22,360kCal/h)

Gas Consumption (G30) 23 Kw

(19,780kCal/h)

Gas Type Option G20, G30/G31

Gas Connection 3/4"

Drain 1 1/4"

1/2" Water Connection


LPG Gas Pressure G20: 20 mbar

G25: 20-25 mbar

G30: 28-30 mbar

G31:37 mbar

TOP



KEY INFORMATION

Cooking Surface Wok Ø 280 mm

Direct heat emission (G20) 6.50 kW

Direct heat emission (G30) 5.75 kW

Latent heat emission (G20) 2.60 kW

Latent heat emission (G30) 2.30 kW

Steam emission (G20) 3.82 kg/h

Steam emission (G30) 3.38 kg/h

Number of Burners 2

Net weight


Shipping height

Shipping width

Shipping depth

Shipping volume

SIDE

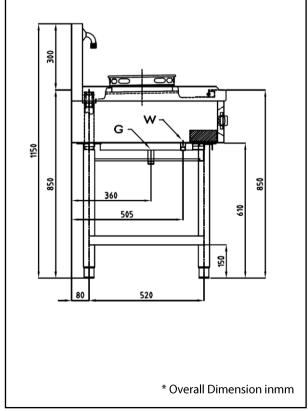

APPROVAL

PT. NAYATI INDONESIA www.nayati.com nayati@nayati.com