



#### GENERAL FEATURES

- Rack size **126x81.5 cm**
- Net weight: 346 Kg
- Wash cycles/racks per hour: 2'-3'-6'-9' / 30-20-10-7
- Stainless-steel wash/rinse arms easily removable
- Wash pump: 2 x 3 kW
- Boiler capacity: 17 lt
- Tank capacity: 100 lt
- Boiler heating element: 9 kW
- Tank heating element: 9 kW
- Water quantity per cycle: 7 lt
- Useful washing height: 800 mm
- Electronic management with color LCD display showing boiler and tank temperatures, multicolored start button and self-diagnostic system
- ES System: energy-saving device that recovers the steam produced inside the machine to heat the incoming cold water
- PRS System: built-in atmospheric boiler, independent from the water supply pressure, with rinse pump to guarantee constant rinse temperature and pressure throughout the entire rinse phase
- High efficiency air gap (A class)
- Double electric detergent and rinse-aid dispenser
- Thermostop function (hot rinse)
- Green function for energy saving
- Automatic end of day self-cleaning cycle
- Vertical self-cleaning washing pumps

#### FILTRATION

- Pre-filtering of the tank water by means of stainless-steel filter, equipped with collection basket
- Stainless-steel pump filter, easily removable

#### BODY

- AISI 304 stainless-steel structure
- Double skinned insulated body
- Preformed wash tank in stainless-steel AISI 316 with rounded corners to avoid grime build-up
- Stainless-steel door handle
- Boiler in stainless-steel AISI 316

## TECHNICAL DATA SHEET

Mod. UK 125/80 EPI ES

#### EQUIPMENT

- 1 stainless-steel rack 126x81,5 cm with wheels
- 1 inlet hose (2 mt length)
- 1 drain hose (2 mt length)

#### OPTIONS

- Drain pump (DP)
- 60 Hz version
- 220-240V3 / 380-415V3 ~ versions (on request)

#### ACCESSORIES FOR WATER TREATMENT

- External water softener

#### ACCESSORIES

- Stainless-steel special tray holders

#### WATER SUPPLY CONNECTION

- **Water supply hardness:**  
Water hardness between 0 and 14°f (0 ÷ 8°d)  
Above 14°f (8°d) suggested water softener
- **Water supply dynamic pressure:**  
Standard between 1 and 5 BAR
- **Water supply temperature:**  
Standard between 10 and 25°C


#### MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided

#### TECHNICAL SPECIFICATIONS

- Electrical supply: **380-415V 3N ~ 50Hz**
- Total power: **15 kW**
- Absorbed current: **24 A (38 A if connected 220-240V3 ~)**
- Power cord supply size: **5 x 6 mm<sup>2</sup>**

## UK 125/80 EPI ES

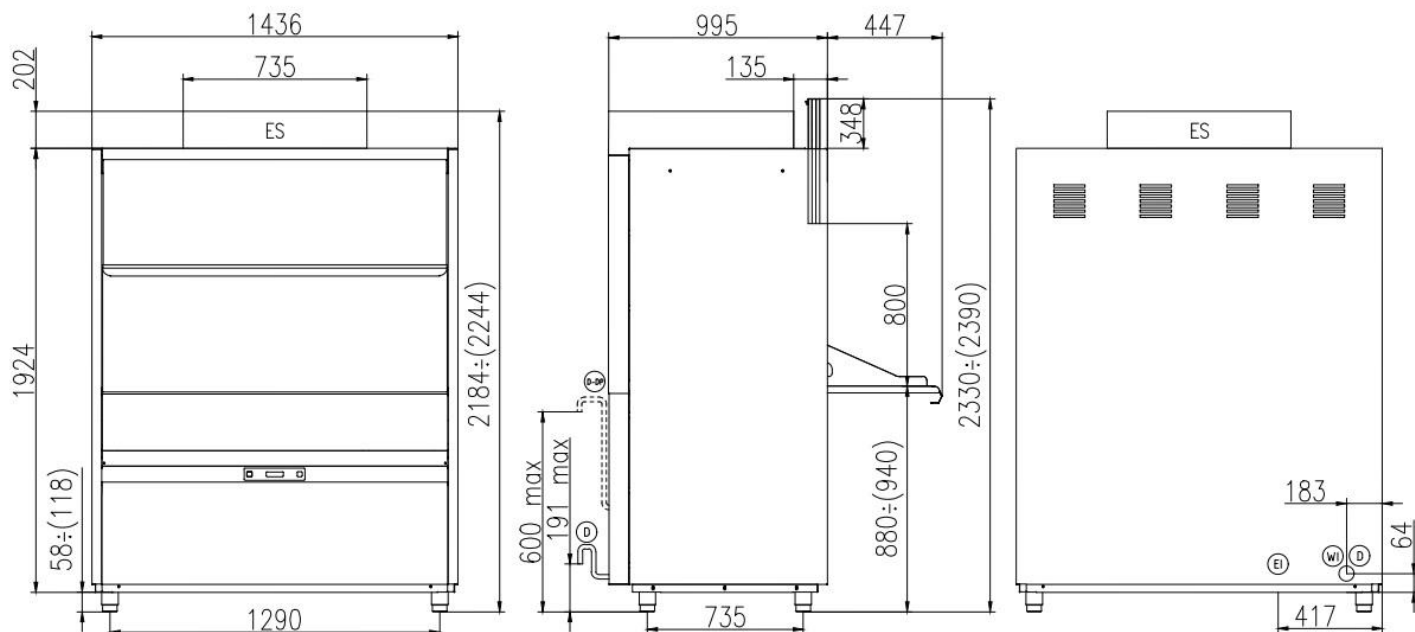

(EI) CAVO DI ALIMENTAZIONE  
POWER CORD SUPPLY  
CABLE D'ALIMENTATION  
CABLE DE ALIMENTACION

(WI) CANNA DI CARICO G 3/4 L=2000 mm  
G 3/4 INLET HOSE L=2000 mm  
TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
TUBO DE ALIMENTACION G 3/4" L=2000 mm

(D) TUBO DI SCARICO Ø 40 mm L=2000 mm  
DRAIN HOSE Ø 40 mm L=2000 mm  
TUYAU DE VIDANGE Ø 40 mm L=2000 mm  
TUBO DE DESAGUE Ø 40 mm L=2000 mm

(D-DP) TUBO DI SCARICO Ø 29 mm L=2500 mm (CON POMPA SCARICO)  
DRAIN HOSE Ø 29 mm L=2500 mm (WITH DRAIN PUMP)  
TUYAU DE VIDANGE Ø 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
TUBO DE DESAGUE Ø 29 mm L=2500 mm (CON POMPA DE DESAGUE)

°C	Min 10°C-MAX 60°C
°C	Min 10°C-MAX 25°C with energy recovery and water softener
Pa	200÷500kPa(2÷5 Bar)
Pa	100÷500kPa(1÷5 Bar) with atmospheric boiler
°f	HARDNESS 5÷14°f-2.8÷8°d