

Asian Cooking - Gas Steamer
Gas - Dim Sum Steamer/ Slim
NGDS 6-75



Due to continuous technical development, the image shown may not represent the latest design of the unit.

DESCRIPTION

Compact gas steamer with nine dim sum trays steaming capacity. Equipped with a high-performance burner of 22 kW power rate.

Equipped with a salt-resistant water tank with a volume of 25 liters for continuous steam, intended to use with Bamboo trays Ø 130 mm. Cold-water supply with automatic water tank filling.

Due to the compact design, the NGDS steamer is the perfect choice for any Asian restaurants with a smaller footprint.

OTHER AVAILABLE MODELS

- NEDS 6-75

MAIN FEATURES

- High-performance atmospheric burner with a power rate of 22 kW.
- Automatic water filling system.
- Usable for bamboo trays of Ø 130 mm
- Piezo ignition.
- Equipped with pilot burner, safety thermocouple, gas valve, gas knob.
- Salt-resistant, stainless steel tank of 25 liters with drain valve.

CONSTRUCTION

- Sturdy frame made of stainless steel AISI 430.
- Stainless steel top panel (1.2 mm), AISI 304 with orbital surface pattern.
- Front panel and side panels (0.8 mm) made of stainless steel AISI 304 with hairline surface pattern.
- Backsplash made of stainless steel AISI 304 with hairline surface pattern (1.2 mm).
- Tubular, height adjustable (+50/-3 mm) stainless steel legs.
- Types of installations: free standing.
- Frame, top and panels, all made of high-grade stainless steel.


INCLUDED ACCESSORIES

- Dim sum plate with nine holes.


OPTIONAL ACCESSORIES

- Steamer kit NSK 450 SQ - two levels with lid for max. 18 pcs bamboo trays Ø 130 mm.


FRONT

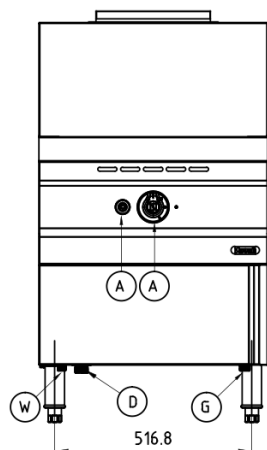

TOP

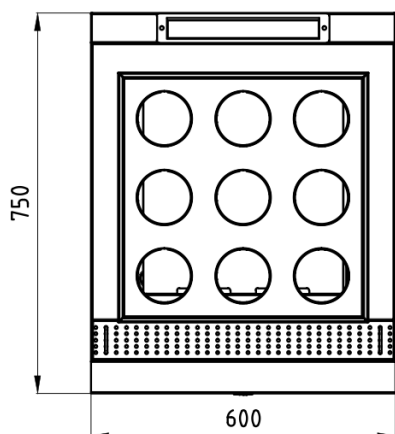

SIDE

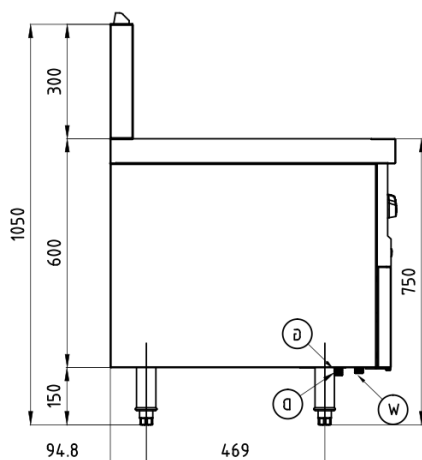

*Overall dimension in mm

TECHNICAL DATA

External Dimensions

Width	: 600 mm
Depth	: 750 mm
Height	: 750/1050 mm

Cooking Surface

Cooking zones	: 25 liters, 470 x 470 mm
---------------	---------------------------

Gas Power Rating

Heat input total	: LPG/Natural Gas 22 kW
No. of burners	: 1
Control type	: High-low power control
Gas type options	: LPG G30, G31 Natural Gas G20, G25

Connections

Gas	: DN 20 (3/4")
Water	: DN15 (1/2")
Drain	: DN25 (1")

Heat & Steam Emissions

Direct heat emission	: LPG/Natural Gas 3.30 kW
Latent heat emission	: LPG/Natural Gas 3.96 kW
Steam emission	: LPG/Natural Gas 5.83 kg/h

PACKAGING DATA

Width	: 630 mm
Depth	: 780 mm
Height	: 1170 mm
Volume	: 0.57 m ³

WEIGHT

Net Weight	: 70 kg
Gross Weight	: 86 kg

PT. NAYATI INDONESIA

www.nayati.com

Nayati reserves the right to make product alterations and or price adjustments at any time and can not be held responsible for any printing errors or omissions.

4/10/2023